



Dongfeng Cummins Curve and Datasheet

Engine Model: ISZ525 40

Curve and Datasheet: FR20241



Dongfeng Cummins Engine Co.,Ltd

Engine Performance Curve FR20241

EURO 4

Engine Model: ISZ525 40

Advertised Power: 392 kW @ 2100 rpm

525 HP @ 2100 rpm

Engine Configuration: D0C3002BX03

CPL: 43354

Peak Torque: 2508 N.m @ 1200 rpm

Displacement: 13.0 L


Cylinders: 6

Bore: 130 mm


Stroke: 163 mm

Aspiration: Turbocharged & Charge Air Cooled

Fuel System: XPI

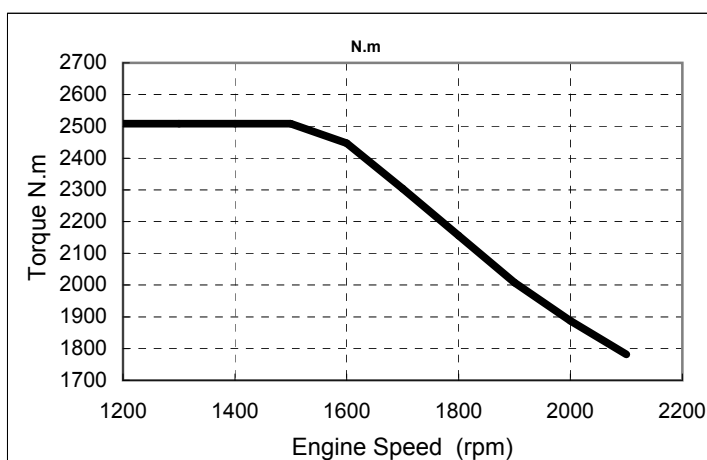

Torque	
rpm	N.m
1200	2508
1300	2508
1400	2508
1500	2508
1600	2447
1700	2304
1800	2156
1900	2007
2000	1887
2100	1782

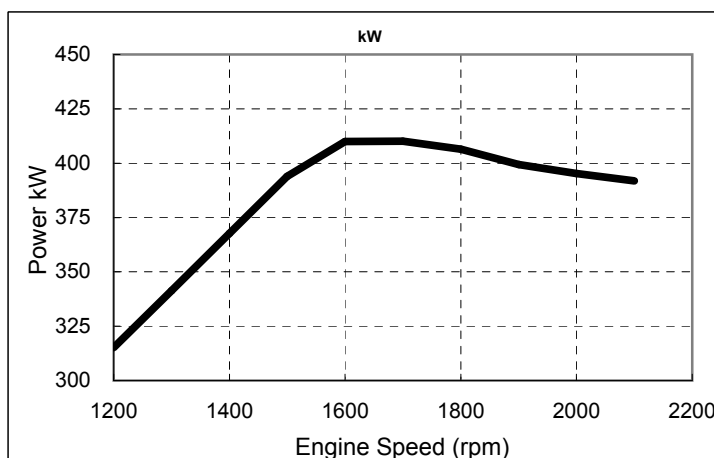

Power	
rpm	kW
1200	315
1300	341
1400	368
1500	394
1600	410
1700	410
1800	406
1900	399
2000	395
2100	392

Curves shown above represent mature gross engine performance capabilities obtained and corrected in accordance with SAE J1349 conditions of 29.61 in Hg (100 kPa) barometric pressure [300 ft (90 m) altitude], 77 deg F (25 deg C) inlet air temperature, and 0.30 in Hg (1 kPa) water vapor pressure with No. 2 diesel fuel.



Dongfeng Cummins Engine Co.,Ltd

Engine Performance Curve FR20241

General Engine Data

Certification.....	GB 17691—2005
Compression Ratio:	17:1
Approximate Engine Weight - Dry:.....	- kg 1195
Approximate Engine Weight - Wet:.....	- kg 1260
Center of Gravity	
from front face of block:.....	- mm 519
above crankshaft centerline:.....	- mm 201
Maximum static mounting surface bending moment	
Rear face of block:.....	- N•m 1356
Bolt pad for front support:.....	- N•m 678
Maximum crankshaft thrust bearing load limit	
Intermittent load:.....	- N 9786
Continuous load:.....	- N 4893

Air Intake System

Maximum temperature rise between ambient air and engine air inlet:	- °C 11.1
Maximum temperature rise between ambient air and intake manifold:	- °C 30
Maximum intake air restriction (heavy duty air cleaner):	
dirty filter:	- kPa 6.2
clean filter:	- kPa 2.5

Exhaust System

Max. back pressure imposed by complete exhaust system:	- kPa 21
Maximum allowable static bending moment at exhaust outlet flange:	- N•m 27
Exhaust pipe size normally acceptable:.....	- mm dia 125

Electrical System

System voltage:	- V <u>24</u>
-----------------------	---------------

Performance Data

Idle Speed:	- rpm 600 - 800
Maximum no load governed speed:	- rpm 2300
Maximum over speed capability(15secs max.):	- rpm 2625
Maximum altitude for continuous operation:	- m 5200
Torque available at clutch engagement:	- N.m 1152

Cold Start Performance

Minimum ambient temperature for unaided cold start:	- °C -15
Minimum ambient temperature for aided cold start:	- °C -30



Dongfeng Cummins Engine Co.,Ltd

Engine Performance Curve FR20241

Cooling System

Maximum allowable pressure drop across charge air cooler and OEM CAC piping: - kPa 10.1

Minimum cooling capability:

Engine out coolant to ambient @ 1,600 RPM: - °C 60.6

Engine out coolant to ambient @ 1,200 RPM: - °C 65.6

Charge air cooler to ambient @ 1,600 RPM: - °C 23.9

Engine Speed RPM	Oil Pressure kPa	Air to Turbo m³/min	Air From Turbo		Exhaust Flow m³/min	Exhaust Temp °C	Fuel Consumption	Coolant Flow l/min	Heat Rejection		Friction Power kW
			Flow kg/min	Pressure kPa					Coolant Kw	Air kW	
2100	276	33.2	38.1	203	73.3	487	85.3	510	172.0	81.0	58.0
1600	259	28.9	34.0	236	69.9	525	84.8	390	165.0	80.0	29.0
1200	248	19.6	23.0	199	51.5	531	62.6	294	137.0	50.0	25.0

All values within ±5%

Base engine data refer to D0C3002BX03

All data subject to change without notice. Dongfeng Cummins Engine Co., Ltd